



Wilcoxon Research models 780B and 780C Compact general purpose accelerometers




Features

- Rugged design
- Corrosion resistant
- Hermetic seal
- Case isolated
- ESD protection
- Reverse wiring protection
- EMI / RFI shielded
- 780B option: 10% sensitivity tolerance
- 780C option: 15% sensitivity tolerance

Benefits

- Able to fit in small spaces
- Light weight for walk around programs
- Cross wiring will not harm sensor
- Prevents ground loops in permanent mount applications
- Can be hosed down or submersed with proper connector
- Magnet or permanent mount applications

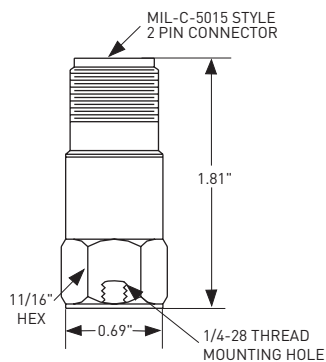

Dynamic

Sensitivity, 25°C	100 mV/g
Sensitivity tolerance:	
780B	±10%
780C	±15%
Acceleration range	80 g peak
Amplitude nonlinearity.....	1%
Frequency response:	
± 5%.....	1 - 7,000 Hz
± 10%.....	0.7 - 9,000 Hz
± 3 dB	0.4 - 14,000Hz
Resonance frequency.....	30 kHz
Transverse sensitivity, max.....	5% of axial
Temperature effect on sensitivity:	
-50° C.....	-5%
+120° C.....	+5%

Electrical

Power requirement:	
Voltage source	18 - 30 VDC
Current regulating diode	2 - 10 mA
Electrical noise, equiv g:	
Broadband 2.5 Hz to 25 kHz.....	500 µg
Spectral	
10 Hz.....	7 µg/√Hz
100 Hz.....	4 µg/√Hz
1000 Hz.....	2 µg/√Hz
Output impedance, max.....	100 Ω
Bias output voltage	12 VDC
Grounding.....	case isolated, internally shielded

Environmental

Temperature range	-50 to 120° C
Vibration limit.....	500 g peak
Shock limit	5,000 g peak
Electromagnetic sensitivity, equiv g, max	70 µg/gauss
Sealing	hermetic
Base strain sensitivity, max.....	0.0002 g/µstrain

Physical

Sensing element design.....	PZT, shear
Weight.....	62 g
Case material.....	316L stainless steel
Mounting	1/4-28 UNF tapped hole
Output connector	2 pin, MIL-C-5015 style
Mating connector	R6 type
Recommended cabling	J10 / J9T2A

Connections

Function	Connector pin
ground	shell
power/ signal	A
common	B

Accessories supplied: SF6 mounting stud (metric mounting available); calibration data (level 2)
Note: Frequency response and spectral noise values are typical

Meggitt Sensing Systems
20511 Seneca Meadows Parkway
Germantown MD 20876
USA

Tel: 301 330 8811
Fax: 301 330 8873
Email: wilcoxon@meggitt.com

www.wilcoxon.com
www.meggitt.com

MEGGITT
smart engineering for
extreme environments
99014 Rev.A 8/09

