




"Your Direct Source for Plant Maintenance, Reliability, Test & Measurement"

[www.reliabilitydirectstore.com](http://www.reliabilitydirectstore.com)

2911 South Shore Blvd. Suite 170, League City, TX USA 77573 Phone: 281-957-5283 Fax: 281-334-4255

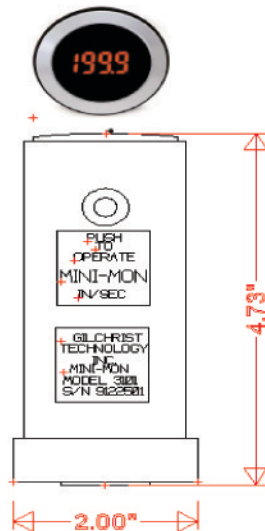

## System Specifications

### Electrical

Power source

9 volt lithium Battery

1.2 ampere hour capacity ( approx., 2 year life expectancy)

Range:

1.0 ips/sec or 25 mm

Temperature Sensitivity:

From 0°C to 50°C, tolerance is within ±5%

### Linearity

1% over temperature range

Frequency Response (±3db):

7.5 Hz to 2k Hz.

### Environmental

Operation: -0°C ~ +50°C.

100% non-condensing.

### Physical

Dimension 5" x 1.75"

Mounting: 3/8"-24 stud

Material: Aluminium, Powder Coated.

[www.reliabilitydirectstore.com](http://www.reliabilitydirectstore.com)

2911 South Shore Blvd. Suite 170, League City, TX USA 77573 Phone: 281-957-5283 Fax: 281-334-4255